


Features

- 915MHz Center Frequency
- 50 Ohm Impedance
- VSWR: 1.03
- Return Loss: -32dB
- Bandwidth: 7MHz
- Gain 3.3dBi
- Single Patch Design
- Vertical Polarization
- SMA Connector
- Operating Temperature:
-65°C to 165°C

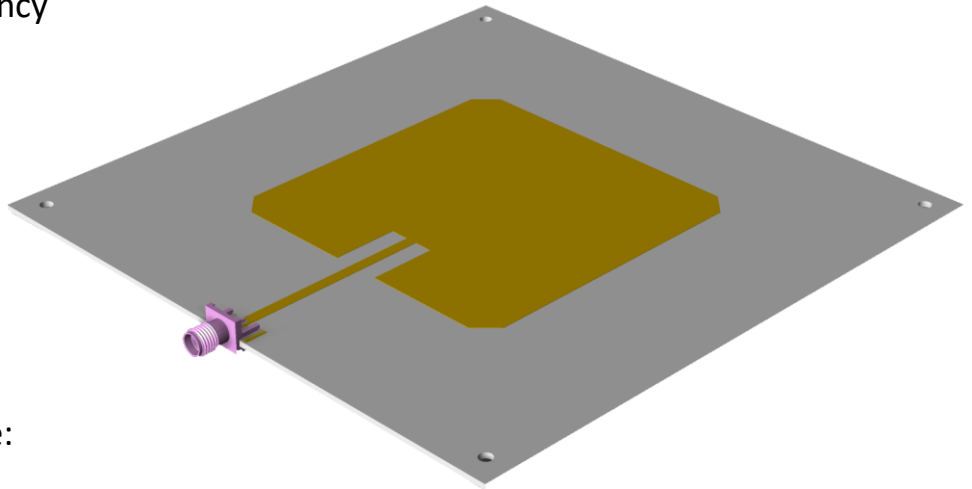

Product Link:

<https://www.saturnpcb.com/pa915/>

Applications

- ISM Band radios
- Back-Scatter Type RFID Systems

Description

The SPCBD-S102-07 is a low-cost solution for ISM band applications as well as back scatter type RFID systems that require a high-performance antenna. It utilizes a single patch design with a 915MHz center frequency and is manufactured using high temperature [Kappa 438](#) for durability in extreme conditions.

Dimensions

L•W•H: 5.5"•5.5"•0.062"

